


ROSEBROOK

TRACERS INC.

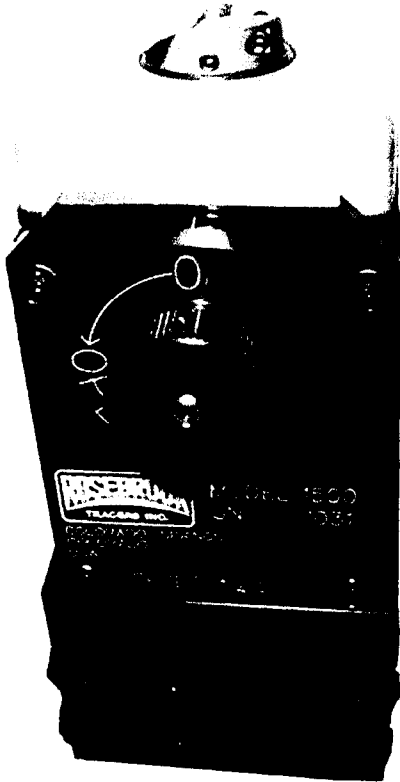

Rosebrook Dual Axis Controlled Feed Hydraulic Turning Profile Valve **Model 1500**

Rosebrook Tracers Model 1500 is a two axis tracer that will trace in two axis while also controlling the feed rate. The feed rate is variable and can be adjusted to meet your needs. The tracing is accomplished by the use of a stylus to contact a template. Movement of the stylus controls the precision ground spool which then directs hydraulic flow to controlled hydraulic cylinders or hydraulic motors. The valve can be mounted in any position required by the user. The valve has a standard one year warranty for manufacturing defects.


ROSEBROOK TRACERS INC

3105 N CASCADE #106

COLORADO SPRINGS, CO 80907-5184 USA

719.632.8894 PHONE OR FAX

www.rosebrooktracer.com

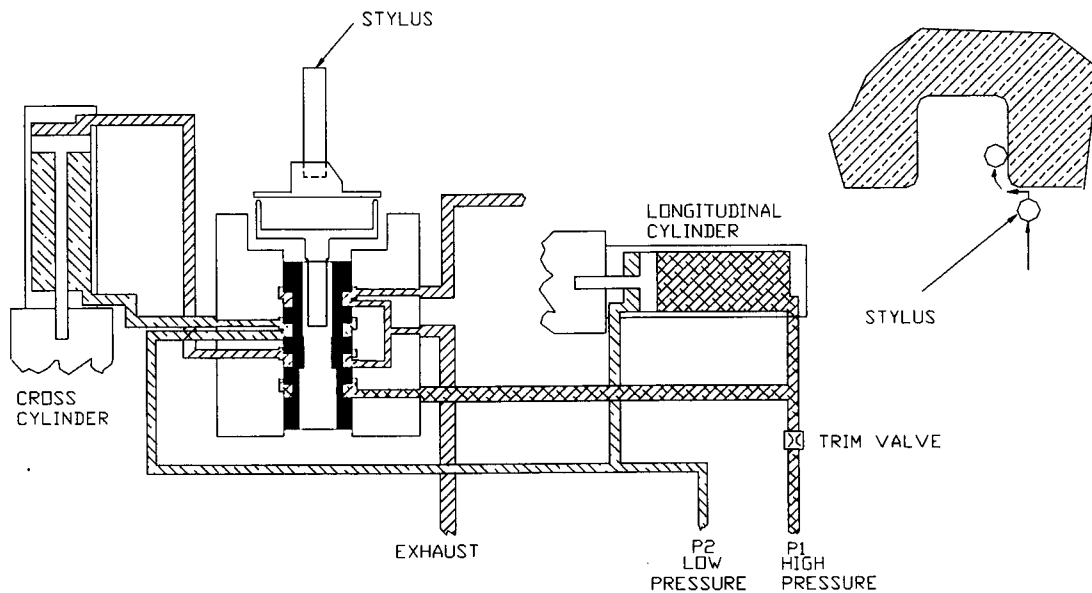


TYPICAL INSTALLATION

OPERATING PRESSURE
OPERATING TEMPERATURE
POWER UNIT

200-500 P.S.I/ 14.06-35.16 Kg/cm
60-110° F/ 15.5-43.3° C

HYDRAULIC OIL
FILTERING
WEIGHT

ADEQUATE FOR CONTROLLED
CYLINDERS OR MOTORS
80SSU-300SSU VISCOSITY
2-5 MICRON FILTER REQUIRED
8.2 POUNDS/3.7 KILOGRAMS

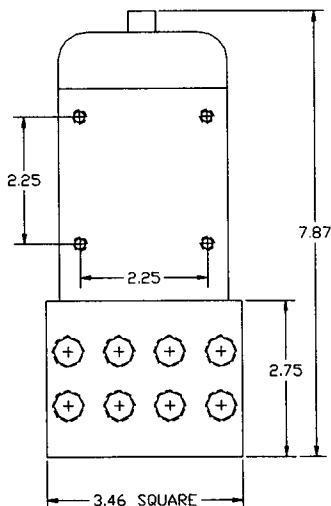

ROSEBROOK TRACERS INC
3105 N CASCADE #106
COLORADO SPRINGS, CO 80907-5184 USA
719.632.8894 PHONE OR FAX

www.rosebrooktracer.com